storage SOLUTIONS
ONE SOURCE • ONE RESULT

RIDGURAK | Pallet Racking Identifiers

RIDGURAK beams can be identified by their clip, embossed logo, and unique punchings, shown to the left.

For help identifying your current beams, send pictures of your beams to Storage Solutions.

CRITICAL MEASUREMENTS

- Identify length of beam from inside connector to inside connector
- Identify beam face height
- Identify connector height

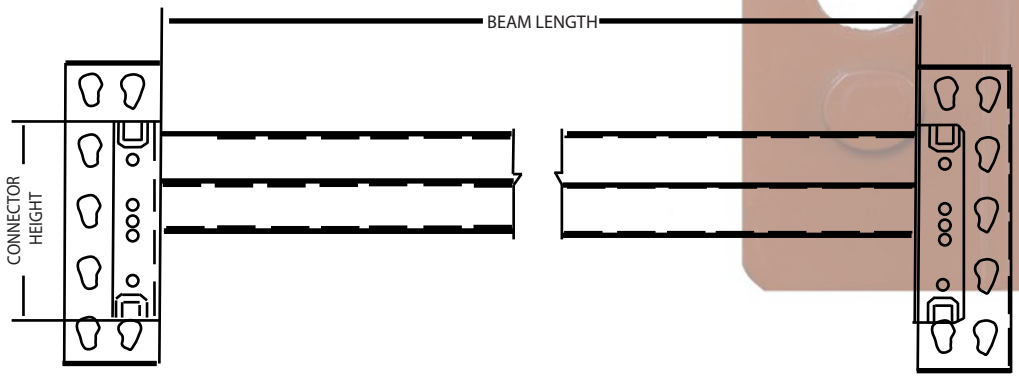



Continue to Capacity Charts on page 2

Your material handling partner.

We buy and sell new and used equipment.

CORPORATE OFFICE
910 East 169th Street, Westfield, IN 46074

SALES OFFICES
Kansas City | Los Angeles | Minneapolis | Nashville | Phoenix

866.474.2001 | www.storage-solutions.com

FOR MORE INFORMATION, CONTACT:
Storage Solutions
866.474.2001
newusedsale@storage-solutions.com

BEAM CAPACITY

Beam Profile	Beam Lengths										
	48"	60"	72"	84"	92"	96"	102"	108"	120"	144"	156"
250 S	5,700	4,530	3,130	2,300	1,910	1,750	1,550	1,380	1,120	770	660
300 S	7,500	5,980	4,820	3,530	2,940	2,690	2,380	2,120	1,720	1,190	1,010
355 S	9,760	7,770	6,460	5,330	4,440	4,070	3,600	3,210	2,590	1,790	1,520
410 L	10,810	8,620	7,150	6,110	5,570	5,200	4,600	4,100	3,310	2,290	1,940
410 S	12,000	9,780	8,120	6,930	6,320	5,830	5,160	4,600	3,710	2,570	2,180
465 S	12,000	11,970	9,940	8,490	7,740	7,410	6,960	6,320	5,110	3,530	3,000
500 S	12,000	12,000	11,170	9,540	8,700	8,330	7,830	7,380	6,140	4,250	3,610
550 S	18,000	18,000	18,000	11,150	10,160	9,720	9,140	8,620	7,740	5,420	4,610
600 S	18,000	18,000	18,000	12,850	11,710	11,210	10,540	9,940	8,920	6,790	5,770
650 S	18,000	18,000	18,000	14,660	13,360	12,790	12,020	11,340	10,180	8,360	7,110
650 R	18,000	18,000	18,000	18,000	15,160	14,520	13,640	12,870	11,550	9,370	7,970

- Capacities are based on uniformly distributed loads per pair of beams.
- Capacities listed are for non-seismic conditions. For seismic conditions consult with Ridg-U-Rak sales or engineering.
- Capacities listed are for a 2-pallet wide condition.
- All beams over 114" in length should utilize at least (1) flanged, tek-screwed or lock-in cross bar located at mid length.
- Maximum shelf load for Teardrop Beams using 6" connectors with 2-pins is 12,000# per pair.
- Maximum shelf load for Teardrop Beams using 8" connectors with 3-pins is 18,000# per pair.

CORPORATE OFFICE
910 East 169th Street, Westfield, IN 46074

SALES OFFICES
Kansas City | Los Angeles | Minneapolis | Nashville | Phoenix

866.474.2001 | www.storage-solutions.com

FOR MORE INFORMATION, CONTACT:
Storage Solutions
866.474.2001
newusedsale@storage-solutions.com